

FC IFS 2 - Insulated Façade System

Assembly #	Wall Type	Stud Size (mm)	Steel			Exterior Cladding	Building Wrap	Cavity Fill	Interior lining	Rating Side	Fire Rating (Min.)	Acoustic Rating (STC dB)	Thermal Rating (M ² K/W)
			Thickness (mm)	Coating	Grade								
FC IFS 2	Exterior or Interior Load Bearing Wall	89 to 150	0.95 to 2.00	Z275	G350 to G550	FRAMECAD® 60mm Insulated Façade System	FRAMECAD® Tyvek®	Rockwool or Glasswool min. R-Value 1.9 M2 K/W	FRAMECAD® 15mm Fire Guard Plasterboard	Inside	60 min.	45	2.60
											Ref. FCTR.1401		

Framing and Wall Height

FRAMECAD® Stud width shall be 35mm minimum. Stud spacing shall be at 610mm centers maximum. Frame height as determined by specific design.

Cladding

FRAMECAD® 60mm Insulated Façade System on the external side of the FRAMECAD® cold formed steel wall frame.

All sheets to be fixed a minimum of 50mm from ground level unless a "Z" flashing is provided or as per local building regulations.

All Sheets to extend below the finished floor level by a minimum of 50mm.

Building Wrap

Install with a 150mm overlap between runs, with each higher run lapping over the layer below. Install external cladding without delay.

Cavity Fill

Rockwool or Glasswool Insulation. Avoid creating gaps and spaces, as they will allow warm air to bypass the insulation and escape. Cut insulation to size using a sharp utility knife, allowing an additional 25mm (1") to both the width and length for a snug fit.

Rockwool or Glasswool min. R-Value 1.9 M² K/W.

Lining

One layer of FRAMECAD® 15mm Fire Guard plasterboard on internal side of the FRAMECAD® cold formed steel wall frame.

Vertical fixing. Full height sheets shall be used where possible.

Horizontal fixing is permitted as long as all longitudinal sheet joints are formed over nogs / dwangs.

When sheet end butts joints are unavoidable, they shall be fixed at 200mm centres and formed over framing. All sheet joints must be formed over framing.

Linings are fixed 10mm off the floor.

Fastening
Cladding

FRAMECAD® 60 mm Insulated Façade System is fixed directly to the FRAMECAD® cold formed steel wall frame vertically and direct fixed to the cold formed steel frame. All sheets must be fully supported by the frame and affixed by using 8g x 80mm screw fasteners with plastic washers. For fastening placement please refer to FRAMECAD® Trade Spec Document 2.4.

Lining

15mm FRAMECAD® Fire Guard plasterboard to be fixed using 001848 FRAMECAD® 6g x 32mm Bugle Head Drill Point screws, at 200mm centers along sheet perimeter and centre studs. Fastening placement should be 12mm from sheet edge and 50mm from sheet corners.

Note: FRAMECAD® recommends a glue and screw method to ensure linings are affixed to wall, ceiling and floor frames. Glue dabs must be intermittent with a minimum distance of 100mm from fastening placement.

Jointing and Finishing


All screw / fastener heads should be covered with joint compound and all sheet joints to have reinforced tape and stopped / jointed in accordance with the stopping / jointing compound manufacturers recommendations.

Fire Stopping / Jointing

Seal any gaps and service penetrations with an intumescent sealant to prevent penetration of flame.

Acoustic Stopping/ Jointing

Apply sound seal at junctions between drywall frame and adjoining structure. Sound seal is to be provided as a continuous band to clean, dry, dust free surfaces, leaving no gaps. Seal any gaps and service penetrations.

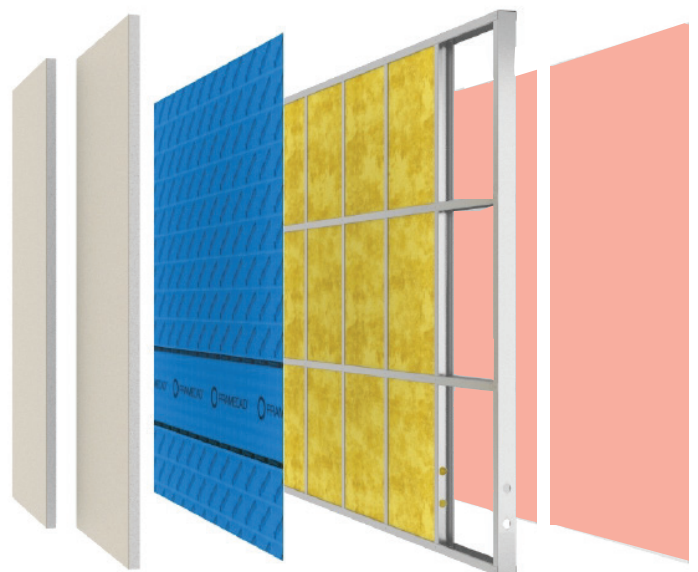

NOTE: In order for FRAMECAD® Wall Solutions to perform as designed all components must be installed exactly as prescribed. Substituting building components may produce an entirely different solution and may seriously compromise performance.

FRAMECAD® Design and Build System delivers a full range of building assemblies that meet fire, thermal and acoustic values. For details on the appropriate assembly for your project please contact us.

www.framecad.com

DISCLAIMER:

This document is current as at July 2015 and supersedes all previous versions of the FRAMECAD® FC IFS 2.

The material in this document is provided for general information purposes only.

Although all reasonable efforts have been made to ensure that the information is current, relevant and accurate as at the date of issue, the information provided is selective and may not be complete or suitable for your intended use or jurisdiction.

No information in this document constitutes, or shall be relied upon as constituting, the giving of advice of any nature. Nor is any such information to be used as a substitute for (1) specific advice from appropriate independent professional advisors in your jurisdiction regarding your particular facts and circumstances or (2) compliance with the requirements of applicable regulatory authorities, standards, regulations, laws, or building codes.

You should not act (or refrain from acting) based upon information provided by FRAMECAD® without independently verifying the original source information and, making your own independent assessment, with the assistance of appropriate independent professional advisors, regarding your particular facts and circumstances.

FRAMECAD® makes no representation or warranty, express or implied, as to the accuracy, completeness or suitability for purpose, of any information in this document.

To the extent permitted by law, FRAMECAD® accepts no responsibility to the recipient or any other person for any loss, damage, cost or expense (whether direct or indirect and however caused, including by negligence) incurred and arising out of or in connection with any use or reliance by any of them on the information in this document including, but not limited to, as a result of any error, omission or misrepresentation in any information or statement in this document. This limitation of liability includes but is not limited to incidental, special or consequential damages, damages for loss of business or other profits. Liability which cannot legally be excluded is limited to the maximum extent possible."

Any reproduction or dissemination of all or any part of this document is prohibited, except with the prior written consent of FRAMECAD® Ltd.